



Contact us 415-960-4853

sales@omexindustries.com

www.omexindustries.us

823-9234-075- Three-Phase Ventilated-USA-DOE


Product Details	
KVA	75.00
UPC#	
Enclosure	NEMA 3R Ventilated
Phase	Three-Phase
Line Voltage	480V-Delta
Load Voltage	208Y/120V
E/S Shielded	No
Windings	Aluminum
Temp. rise	150°C
Frequency	60 Hz
Taps	2 - 2.5% FCAN; 4- 2.5% FCBN
Impedance	6.30%
Total loss (170°C)	2100 W
Regulation (full load)	PF 1.0=2.65 PF 0.8=5.34
Insulation Class	220°C

Product Details		
Efficiency Type	DOE-2016	
Minimum Efficiency (35%)	98.60	
Busbar Termination	Primary: AL	
	Secondary: AL	
Sound	50 dB Max	
Approvals	UL, cUL, DOE	
1		
Weight & Dimensions (Imperial / Metric)		
A	40.00"	Contact us for exact measurements.
B	28.5"	
C	24"	
D	Contact us for exact measurements.	
E		
Est Ship Wt. approx.	574.00 lbs.	260.40 kg

T480E Wiring Diagram & Connections


Wiring Diagram

Primary: 480 Volts Delta
Secondary: 208Y/120 Volts

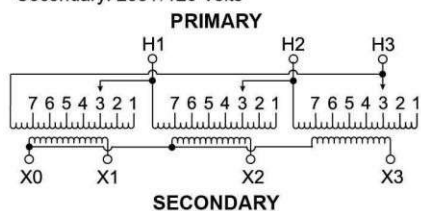

Connections

Primary Volts	On Each Coil Jumper Taps To	Primary Lines Connect To
504	1	H1, H2, H3
492	2	H1, H2, H3
480	3	H1, H2, H3
468	4	H1, H2, H3
456	5	H1, H2, H3
444	6	H1, H2, H3
432	7	H1, H2, H3
Secondary Volts		Secondary Lines Connect To
208		X1, X2, X3
120		Between X0 and X1 or X2 or X3
1 phase		

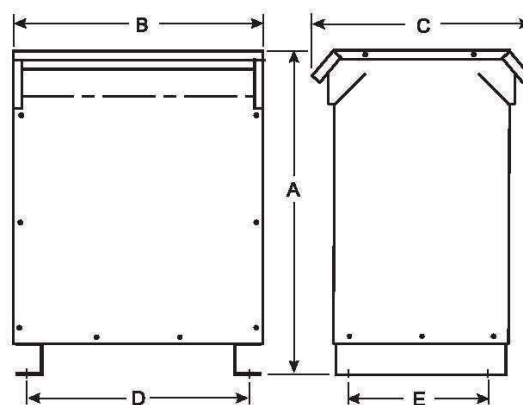

All specifications subject to change. Contact Factory for certified drawings. © 2024 OMEX Industries LLC.